


# TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES


BPR 25/50 D, BPR 35/60, BPR 35/60 D

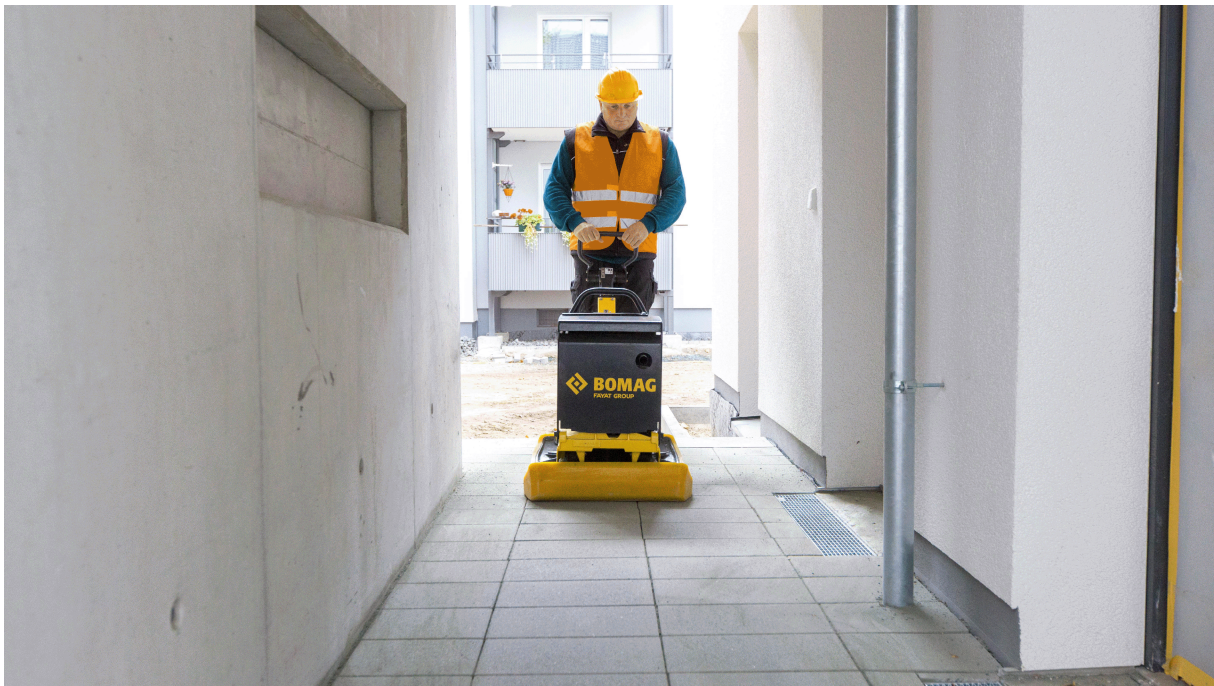

**No breakage of paving stones**



**No damage to installations and borders**

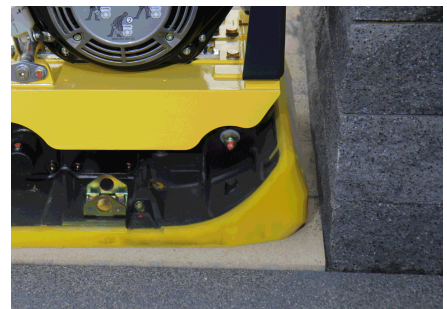

**Vibratory compaction to the very last stone**

**Shipping dimensions in m3**


<b>BPR 25/50 D</b>	0,594
<b>BPR 35/60</b>	0,652
<b>BPR 35/60 D</b>	0,711

**Standard Equipment**

- STONEGUARD Special base plate
- Protective engine covering
- Comfortable control lever
- Height adjustable steering rod
- Low vibration steering rod
- Steering rod lockable in transport and working position
- Vibration and throttle regulation on the steering rod
- Highly wear-resistant, powder-coated base plate
- Fully protected V-belt
- Automatic decompression (BPR25/50D,BPR35/60D)
- Recoil starter
- Back-up drive protection
- Automatic shutdown at low oil level (BPR35/60)
- 3-2-1 Warranty
- Hour meter (Engine protection hood BPR35/60)

**Optional Equipment**

- Fully closed engine protection hood made of high-strength steel (+10kg)
- Transport wheels (+5kg)
- Tool kit
- Special painting
- Service Kit
- Electric starter + Hour meter (+20kg/BPR35/60D)
- TOUGH WARRANTY

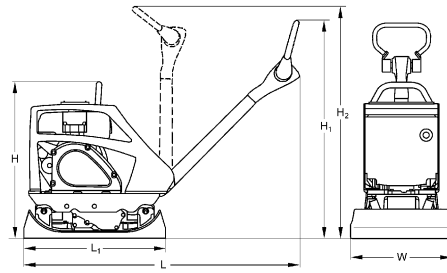

**Dimensions in mm**

	H	H1	H2	L	L1	W
<b>BPR 25/50 D</b>	750	940	1090	1495	720	530
<b>BPR 35/60</b>	670	1030	1160	1545	832	630
<b>BPR 35/60 D</b>	730	1030	1160	1545	832	630

**Technical Data**

		<b>BOMAG</b> <b>BPR 25/50 D</b>	<b>BOMAG</b> <b>BPR 35/60</b>	<b>BOMAG</b> <b>BPR 35/60 D</b>
<b>Weights</b>				
Operating weight CECE (W) .....	kg	169	228	248
Basic weight .....	kg	166	225	245
<b>Dimensions</b>				
Basic working width .....	mm	530	630	630
Lowest passing height .....	mm	750	670	730
Min. height w. steering in top position .....	mm	940	1.030	1.030
Max. height w. steering in top position .....	mm	1.260	1.180	1.180
<b>Driving Characteristics</b>				
Working speed, max. ....	m/min	20	20	20
Max. gradeability (dep. on soil con.) .	%	32	32	32
<b>Drive</b>				
Engine manufacturer .....		Hatz	Honda	Hatz
Type .....		1B20	GX 160	1B20
Emission stage .....		Stage V	StageV/CARB P.3	Stage V
Cooling .....	air		air	air
Number of cylinders .....		1	1	1
Performance ISO 3046 .....	kW	3,1		3,1
Performance SAE J 1349 .....	kW		3,6	
Speed .....	min-1	3.000	3.600	3.000
Drive system .....		mech.	mech.	mech.
Fuel .....		Diesel	Gasoline	Diesel
Fuel comsump. aver. during operation	l/h	0,7	1,1	0,7
<b>Exciter system</b>				
Frequency .....	Hz	85	80	80
Centrifugal force .....	kN	25	35	35
<b>Capacities</b>				
Fuel .....	l	3,0	3,1	3,0

Technical modifications reserved. Machines may be shown with options.



PRE 692 66 010

040219 Sa03

**BOMAG**  
Hellerwald  
D-56154 Boppard  
P.O. Box 5162  
Tel. (0)6742 - 1000  
Fax (0)6742 - 3090

